

VCXT™

Very Critical eXtreme Temperature isolation set

The GPT VCXT™ flange insulating kit is comprised of an insulating gasket, insulating sleeves, insulating washers and metal backing washers. The insulating gasket is constructed from a machined metal core utilizing a serrated profile. The metal core is faced with THERMa-PUR™, a proprietary high temperature sealing material that outperforms vermiculite and mica. Correct gasket location is ensured by the use of a Garlock 5500 spacer ring, located around the periphery of the serrated metal core.



SERVICE

GPT™ high temperature flange insulation sets are specifically designed to create a seal and maintain electrical isolation across a wide range of seating stresses and flange classes in elevated temperature service. They can be utilized in load compromised connections; such as damaged and/or lined flanges and also heavily bolted connections where significant gasket stresses may be generated. In addition to the relatively high compression characteristics of the facing material, isolation performance can be achieved over a wide range of flange surface finishes. Please reference the **VCXT data sheet**. The use of THERMa-PUR™ as the sealing material pushes the performance of the GPT VCXT™ insulation kit beyond the temperature capability of traditional insulation sets based on vermiculite, mica or glass/epoxy sealing technology. THERMa-PUR™ is designated as fire safe, complying with the requirements of the oil and gas industry's recognized API 607 and API 6FB fire tests. Contact GPT product management for certification information.

Operational pressure range:

- » Full vacuum to ASME B16.5 2500lb

Operational temperature range:

- » -328°F to 770°F (-200°C to 410°C)

THERMa-PUR™ is suitable for sealing across a wide range of chemicals (pH 0-14) and sweet and sour gaseous and liquid hydrocarbons. Reference the **chemical compatibility chart**.

The standard 316L core and washer metallurgy are NACE (MR0175) compliant.

The insulating gasket and washers have been designed and developed for use in standard pipeline flanges where both cathodic protection and high integrity sealing are required at elevated service temperatures. For non-standard bolted connections please consult your regional GPT sales manager or GPT engineering at:


gpt.engineering@gptindustries.com

PRODUCT BENEFITS:

- » Highest temperature rated isolating product available
- » Firesafe per API 607 and API 6FB testing
- » A better option for steam applications than GRE
- » Sizes available ½” – 48” NPS
- » Wide range of chemical resistance

GENERAL ASSEMBLY:

Each GPT VCXT™ insulating set comprises the following components: High Temperature Insulating Gasket-1 per flange. High Temperature Insulating Sleeves-1 per flange bolt. High Temperature Insulating Washers-2 per flange bolt. Metallic Backing Washers-2 per flange bolt. Please contact your GPT sales manager when specific operating parameters requires confirmation of appropriate materials.

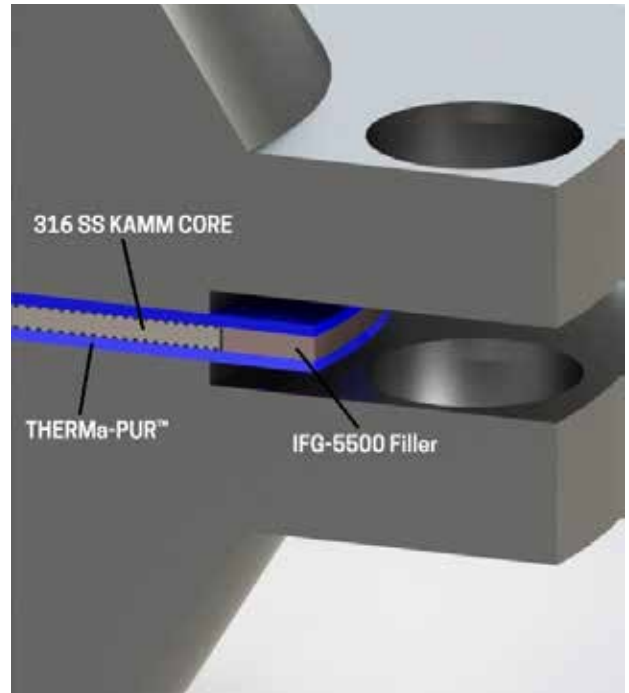

GPT 1-19.11.2017



www.gptindustries.com

4990 Iris Street
Wheat Ridge, CO 80033
Tel: (303) 988-1242
Fax: (303) 988-1922

6455 Clara Road, Suite 300
Houston, TX 77041
Tel: (713) 747-6948
Fax: (713) 747-6029

2 Woodlands Sector 1
#03-11 Woodlands Spectrum 1
Singapore 738068
Republic of Singapore

Unit 3-5, Chester Road
Colmworth Business Park
Eaton Socon, St. Neots
Cambridgeshire, PE 19 8YT

Oilfields Supply Center Ltd.
Executive Office 4, PO Box 1518
Jebel Ali Free Zone, Dubai
United Arab Emirates